




Dynemech DL series is used for light to medium weight machines suited to levelling screw support or having tapped hole in the base Machine levelling.

Note :- Please confirm the Dimple size as per the bolt size in the machine base.

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DL1-u-55-FG	150	55	21	0.9	18	From -16 to 90	Dark Grey	Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing and Textile Machines etc.
DL2-u-85-FG	350	85	28	0.9	18	From -16 to 90	Dark Grey	
DL3-u-112-FG	600	112	28	0.9	18	From -16 to 90	Dark Grey	
DL4-u-135-FG	900	135	30	0.9	18	From -16 to 90	Dark Grey	
DL5-u-160-FG	1400	160	30	0.9	18	From -16 to 90	Dark Grey	
DL6-u-185-FG	1900	185	34	0.9	18	From -16 to 90	Dark Grey	
DL7-u-215-FG	2500	215	35	0.9	18	From -16 to 90	Dark Grey	
DL8-u-249-FG	3500	249	44	0.9	18	From -16 to 90	Dark Grey	
DL9-u-276-FG	4200	276	43	0.9	18	From -16 to 90	Dark Grey	
DL1-u-10-55-FG	150	55	16	0.9	25	From -16 to 90	Dark Grey	
DL2-u-10-85-FG	350	85	23	0.9	25	From -16 to 90	Dark Grey	

DL3-u-10-112-FG	600	112	23	0.9	25	From -16 to 90	Dark Grey	Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing and Textile Machines etc.
DL4-u-10-135-FG	900	135	25	0.9	25	From -16 to 90	Dark Grey	
DL5-u-10-160-FG	1400	160	25	0.9	25	From -16 to 90	Dark Grey	
DL6-u-10-185-FG	1900	185	29	0.9	25	From -16 to 90	Dark Grey	
DL7-u-10-215-FG	2500	215	30	0.9	25	From -16 to 90	Dark Grey	
DL8-u-10-249-FG	3500	249	39	0.9	25	From -16 to 90	Dark Grey	
DL9-u-10-276-FG	4200	276	38	0.9	25	From -16 to 90	Dark Grey	
DL1-u-12-55-FG	150	55	18	0.9	20	From -16 to 90	Dark Grey	Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing and Textile Machines etc.
DL2-u-12-85-FG	350	85	25	0.9	20	From -16 to 90	Dark Grey	
DL3-u-12-112-FG	600	112	25	0.9	20	From -16 to 90	Dark Grey	
DL4-u-12-135-FG	900	135	27	0.9	20	From -16 to 90	Dark Grey	
DL5-u-12-160-FG	1400	160	27	0.9	20	From -16 to 90	Dark Grey	
DL6-u-12-185-FG	1900	185	31	0.9	20	From -16 to 90	Dark Grey	
DL7-u-12-215-FG	2500	215	32	0.9	20	From -16 to 90	Dark Grey	
DL8-u-12-249-FG	3500	249	41	0.9	20	From -16 to 90	Dark Grey	
DL9-u-12-276-FG	4200	276	40	0.9	20	From -16 to 90	Dark Grey	



DL1



DL3



DL5




DL7



DL9

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DL1-m-55-FG	190	55	21	0.7	30	From -16 to 90	Dark Grey	Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines. For machines with high vertical impact.
DL2-m-85-FG	450	85	28	0.7	30	From -16 to 90	Dark Grey	
DL3-m-112-FG	800	112	28	0.7	30	From -16 to 90	Dark Grey	
DL4-m-135-FG	1150	135	30	0.7	30	From -16 to 90	Dark Grey	
DL5-m-160-FG	1750	160	30	0.7	30	From -16 to 90	Dark Grey	
DL6-m-185-FG	2400	185	34	0.7	30	From -16 to 90	Dark Grey	
DL7-m-215-FG	3200	215	35	0.7	30	From -16 to 90	Dark Grey	
DL8-m-249-FG	4000	249	44	0.7	30	From -16 to 90	Dark Grey	
DL9-m-276-FG	5000	276	43	0.7	30	From -16 to 90	Dark Grey	



DL1



DL3



DL5




DL7



DL9

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DL1-I-55-FG	250	55	31	0.8	7	From -16 to 90	Dark Grey	
DL2-I-85-FG	575	85	38	0.8	7	From -16 to 90	Dark Grey	

DL3-I-112-FG	1000	112	38	0.8	7	From -16 to 90	Dark Grey	Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines. For machines with high vertical impact.
DL4-I-135-FG	1600	135	40	0.8	7	From -16 to 90	Dark Grey	
DL5-I-160-FG	2300	160	40	0.8	7	From -16 to 90	Dark Grey	
DL6-I-185-FG	3100	185	44	0.8	7	From -16 to 90	Dark Grey	
DL7-I-215-FG	4000	215	45	0.8	7	From -16 to 90	Dark Grey	
DL8-I-249-FG	5200	249	54	0.8	7	From -16 to 90	Dark Grey	
DL9-I-276-FG	6500	276	53	0.8	7	From -16 to 90	Dark Grey	



DL1



DL3



DL5




DL7



DL9

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DL1-p1-55-FG	75	55	21	0.8	7	From -16 to 90	Dark Grey	Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines. For machines with high vertical impact.
DL2-p1-85-FG	175	85	28	0.8	7	From -16 to 90	Dark Grey	
DL3-p1-112-FG	300	112	28	0.8	7	From -16 to 90	Dark Grey	
DL4-p1-135-FG	500	135	30	0.8	7	From -16 to 90	Dark Grey	
DL5-p1-160-FG	700	160	30	0.8	7	From -16 to 90	Dark Grey	
DL6-p1-185-FG	950	185	34	0.8	7	From -16 to 90	Dark Grey	
DL7-p1-215-FG	1250	215	35	0.8	7	From -16 to 90	Dark Grey	

DL8-p1-249-FG	1500	249	44	0.8	7	From -16 to 90	Dark Grey	Applications: Medium Presses, Punching Presses, Centreless Grinding Machines, Gear Shapers, High Speed Machines on upper floors.
DL9-p1-276-FG	1900	276	43	0.8	7	From -16 to 90	Dark Grey	
DL1-p2-55-FG	80	55	26	0.8	12	From -16 to 90	Dark Grey	
DL2-p2-85-FG	220	85	33	0.8	12	From -16 to 90	Dark Grey	
DL3-p2-112-FG	410	112	33	0.8	12	From -16 to 90	Dark Grey	
DL4-p2-135-FG	620	135	35	0.8	12	From -16 to 90	Dark Grey	
DL5-p2-160-FG	900	160	35	0.8	12	From -16 to 90	Dark Grey	
DL6-p2-185-FG	1200	185	39	0.8	12	From -16 to 90	Dark Grey	
DL7-p2-215-FG	1600	215	40	0.8	12	From -16 to 90	Dark Grey	
DL8-p2-249-FG	2000	249	49	0.8	12	From -16 to 90	Dark Grey	
DL9-p2-276-FG	2600	276	48	0.8	12	From -16 to 90	Dark Grey	
DL1-p3-55-FG	95	55	30	0.8	7	From -16 to 90	Dark Grey	Applications: Tool Room Machines on suspended Floors, Light Weight Presses, Compressors etc.
DL2-p3-85-FG	270	85	37	0.8	7	From -16 to 90	Dark Grey	
DL3-p3-112-FG	490	112	37	0.8	7	From -16 to 90	Dark Grey	
DL4-p3-135-FG	740	135	39	0.8	7	From -16 to 90	Dark Grey	
DL5-p3-160-FG	1060	160	39	0.8	7	From -16 to 90	Dark Grey	
DL6-p3-185-FG	1400	185	43	0.8	7	From -16 to 90	Dark Grey	
DL7-p3-215-FG	1950	215	44	0.8	7	From -16 to 90	Dark Grey	
DL8-p3-249-FG	2400	249	53	0.8	7	From -16 to 90	Dark Grey	
DL9-p3-276-FG	3150	276	52	0.8	7	From -16 to 90	Dark Grey	



DL1



DL3



DL5




DL7



DL9

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DL1-s1-55-FG	80	55	26	0.8	15	From -16 to 90	Dark Grey	Applications: Tool Room Machines, Plastic Injection Moulding Machines, Pressure Die Casting Machines, Shaper, Printing and Textile Machines etc.
DL2-s1-85-FG	200	85	33	0.8	15	From -16 to 90	Dark Grey	
DL3-s1-112-FG	375	112	33	0.8	15	From -16 to 90	Dark Grey	
DL4-s1-135-FG	575	135	35	0.8	15	From -16 to 90	Dark Grey	
DL5-s1-160-FG	800	160	35	0.8	15	From -16 to 90	Dark Grey	
DL6-s1-185-FG	1100	185	39	0.8	15	From -16 to 90	Dark Grey	
DL7-s1-215-FG	1500	215	40	0.8	15	From -16 to 90	Dark Grey	
DL8-s1-249-FG	1900	249	49	0.8	15	From -16 to 90	Dark Grey	
DL9-s1-276-FG	2400	276	48	0.8	15	From -16 to 90	Dark Grey	
DL1-s2-55-FG	125	55	31	0.8	8	From -16 to 90	Dark Grey	Applications: Power Presses, Stamping Machines, Shearing Machines, Punching Machines etc.
DL2-s2-85-FG	300	85	38	0.8	8	From -16 to 90	Dark Grey	
DL3-s2-112-FG	550	112	38	0.8	8	From -16 to 90	Dark Grey	
DL4-s2-135-FG	850	135	40	0.8	8	From -16 to 90	Dark Grey	
DL5-s2-160-FG	1250	160	40	0.8	8	From -16 to 90	Dark Grey	



DL6-s2-185-FG	1700	185	44	0.8	8	From -16 to 90	Dark Grey	Machines. For machines with high vertical impact.
DL7-s2-215-FG	2200	215	45	0.8	8	From -16 to 90	Dark Grey	
DL8-s2-249-FG	2800	249	54	0.8	8	From -16 to 90	Dark Grey	
DL9-s2-276-FG	3500	276	53	0.8	8	From -16 to 90	Dark Grey	



Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DL1-hs1-55-FG	300	55	71	0.8	6	From -16 to 90	Dark Grey	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.
DL2-hs1-85-FG	880	85	78	0.8	6	From -16 to 90	Dark Grey	
DL3-hs1-112-FG	1630	112	78	0.8	6	From -16 to 90	Dark Grey	
DL4-hs1-135-FG	2450	135	80	0.8	6	From -16 to 90	Dark Grey	
DL5-hs1-160-FG	3530	160	80	0.8	6	From -16 to 90	Dark Grey	
DL6-hs1-185-FG	4750	185	84	0.8	6	From -16 to 90	Dark Grey	
DL7-hs1-215-FG	6470	215	85	0.8	6	From -16 to 90	Dark Grey	
DL8-hs1-249-FG	7950	249	94	0.8	6	From -16 to 90	Dark Grey	
DL9-hs1-276-FG	10450	276	93	0.8	6	From -16 to 90	Dark Grey	
DL1-hs2-55-FG	120	55	71	0.8	4	From -16 to 90	Dark Grey	



DL2-hs2-85-FG	350	85	78	0.8	4	From -16 to 90	Dark Grey	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.
DL3-hs2-112-FG	650	112	78	0.8	4	From -16 to 90	Dark Grey	
DL4-hs2-135-FG	980	135	80	0.8	4	From -16 to 90	Dark Grey	
DL5-hs2-160-FG	1410	160	80	0.8	4	From -16 to 90	Dark Grey	
DL6-hs2-185-FG	1900	185	84	0.8	4	From -16 to 90	Dark Grey	
DL7-hs2-215-FG	2590	215	85	0.8	4	From -16 to 90	Dark Grey	
DL8-hs2-249-FG	3180	249	94	0.8	4	From -16 to 90	Dark Grey	
DL9-hs2-276-FG	4180	276	93	0.8	4	From -16 to 90	Dark Grey	
DL1-hs3-55-FG	430	55	56	0.8	7	From -16 to 90	Dark Grey	
DL2-hs3-85-FG	1240	85	63	0.8	7	From -16 to 90	Dark Grey	
DL3-hs3-112-FG	2290	112	63	0.8	7	From -16 to 90	Dark Grey	
DL4-hs3-135-FG	3440	135	65	0.8	7	From -16 to 90	Dark Grey	
DL5-hs3-160-FG	4950	160	65	0.8	7	From -16 to 90	Dark Grey	
DL6-hs3-185-FG	6500	185	69	0.8	7	From -16 to 90	Dark Grey	
DL7-hs3-215-FG	9070	215	70	0.8	7	From -16 to 90	Dark Grey	
DL8-hs3-249-FG	11140	249	79	0.8	7	From -16 to 90	Dark Grey	
DL9-hs3-276-FG	17870	276	78	0.8	7	From -16 to 90	Dark Grey	
DL1-hs4-55-FG	180	55	56	0.8	5	From -16 to 90	Dark Grey	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses, crushers etc.
DL2-hs4-85-FG	530	85	63	0.8	5	From -16 to 90	Dark Grey	
DL3-hs4-112-FG	980	112	63	0.8	5	From -16 to 90	Dark Grey	
DL4-hs4-135-FG	1470	135	65	0.8	5	From -16 to 90	Dark Grey	
DL5-hs4-160-FG	2120	160	65	0.8	5	From -16 to 90	Dark Grey	
DL6-hs4-185-FG	2850	185	69	0.8	5	From -16 to 90	Dark Grey	
DL7-hs4-215-FG	3880	215	70	0.8	5	From -16 to 90	Dark Grey	
DL8-hs4-249-FG	4770	249	79	0.8	5	From -16 to 90	Dark Grey	

DL9-hs4-276-FG	6270	276	78	0.8	5	From -16 to 90	Dark Grey	Applications : Forging Hammers, Heavy Gen Sets, Heavy Industrial machines, Test Rigs, Heavy presses etc.
DL1-hs5-55-FG	430	55	86	0.8	5	From -16 to 90	Dark Grey	
DL2-hs5-85-FG	1240	85	93	0.8	5	From -16 to 90	Dark Grey	
DL3-hs5-112-FG	2290	112	93	0.8	5	From -16 to 90	Dark Grey	
DL4-hs5-135-FG	3440	135	95	0.8	5	From -16 to 90	Dark Grey	
DL5-hs5-160-FG	4950	160	95	0.8	5	From -16 to 90	Dark Grey	
DL6-hs5-185-FG	6500	185	99	0.8	5	From -16 to 90	Dark Grey	
DL7-hs5-215-FG	9070	215	100	0.8	5	From -16 to 90	Dark Grey	
DL8-hs5-249-FG	11140	249	109	0.8	5	From -16 to 90	Dark Grey	
DL9-hs5-276-FG	17870	276	108	0.8	5	From -16 to 90	Dark Grey	

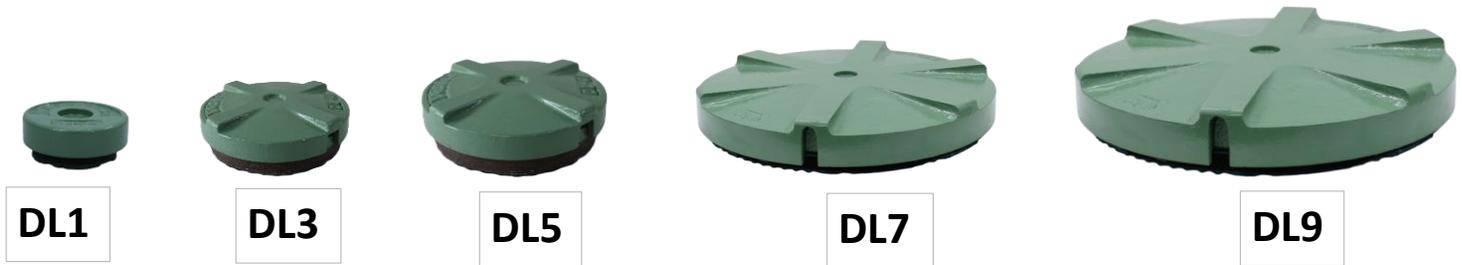

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DL1-h	DL1-h-55-FG	2760	55	0.6	45	From -16 to 90	Dark Grey	Applications : Very Heav and long bed
DL2-h	DL2-h-85-FG	7980	85	0.6	45	From -16 to 90	Dark Grey	
DL3-h	DL3-h-112-FG	14700	112	0.6	45	From -16 to 90	Dark Grey	
DL4-h	DL4-h-135-FG	22080	135	0.6	45	From -16 to 90	Dark Grey	

DL5-h	DL5-h-160-FG	31800	160	0.6	45	From -16 to 90	Dark Grey	machines, long machining centres, planners etc.
DL6-h	DL6-h-185-FG	42840	185	0.6	45	From -16 to 90	Dark Grey	
DL7-h	DL7-h-215-FG	58200	215	0.6	45	From -16 to 90	Dark Grey	
DL8-h	DL8-h-249-FG	71580	249	0.6	45	From -16 to 90	Dark Grey	
DL9-h	DL9-h-276-FG	94140	276	0.6	45	From -16 to 90	Dark Grey	

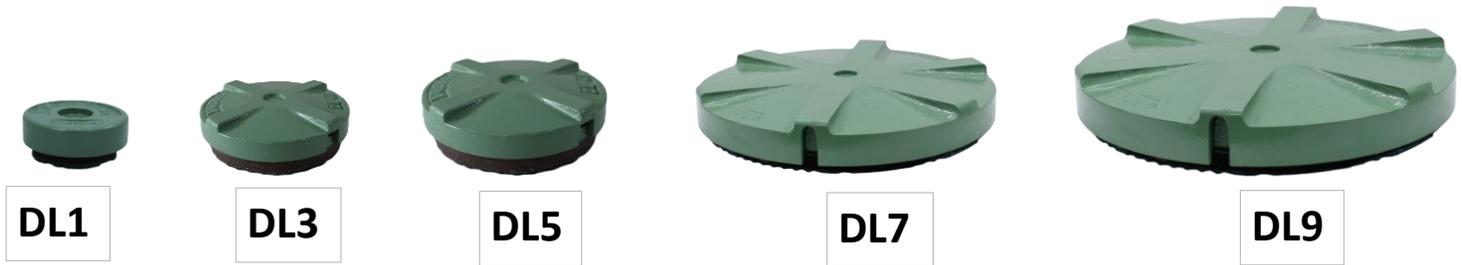

Model	Load Capacity Kg/pc	Diameter (D) mm	Height (H) mm	Coeff. of Friction against Concrete	Natural Frequency at Max. Load (Hz)	Temperature Range (°C)	Color	Applications
DL1-a2-55-FG	190	55	14	0.9	45	From -16 to 90	Dark Grey	
DL2-a2-85-FG	450	85	21	0.9	45	From -16 to 90	Dark Grey	
DL3-a2-112-FG	800	112	21	0.9	45	From -16 to 90	Dark Grey	
DL4-a2-135-FG	1150	135	23	0.9	45	From -16 to 90	Dark Grey	
DL5-a2-160-FG	1750	160	23	0.9	45	From -16 to 90	Dark Grey	
DL6-a2-185-FG	2400	185	27	0.9	45	From -16 to 90	Dark Grey	
DL7-a2-215-FG	3200	215	28	0.9	45	From -16 to 90	Dark Grey	
DL8-a2-249-FG	3975	249	37	0.9	45	From -16 to 90	Dark Grey	
DL9-a2-276-FG	4900	276	36	0.9	45	From -16 to 90	Dark Grey	